

# Citation Evidence Report

EB-2 NIW Petition — National Interest Waiver

Matter of Dhanasar · Prong 2 (well-positioned)


## Tinghui Zhou

Roblox, Foundation AI

[Google Scholar profile](#)

**Generated 2026-05-21 by CiteMap.** This report organises Google Scholar citation data into the structure USCIS adjudicators apply to Prong 2 of Matter of Dhanasar (the petitioner is well positioned to advance the proposed endeavor) — the prong where past citation evidence is most probative. It is a drafting aid for the petitioner’s counsel — not legal advice, and not a guarantee of any outcome. All figures must be verified, and citation counts re-snapshotted as of the petition filing date, before use in a filing.

## A. Overview & Filtering Statement

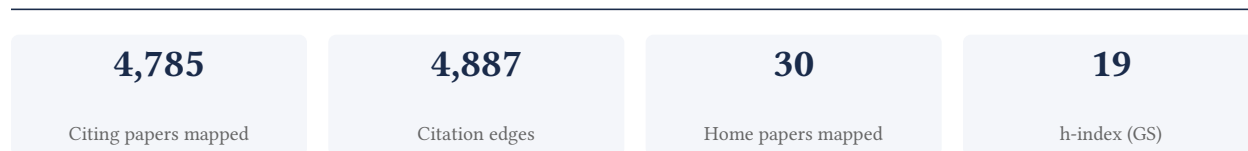

### Filtering statement – methodology & limits

Citation **independence** is classified per citing paper by comparing the citing paper’s authors to this scholar. *Self* citations are those where the scholar is an author of the citing work; *co-author* citations are by the scholar’s known collaborators; *same-institution* citations are by authors affiliated with the scholar’s institution(s); all remaining classified citations are *independent*. Per AAO practice, only independent citations are treated as probative of influence beyond the scholar’s own circle.

**Known limitations – counsel must verify.** (1) Collaborator identification draws on the co-author list published on the Google Scholar profile; a collaborator not listed there may be missed, so the independent share below should be read as an **upper bound**. (2) Citation counts are a crawl-time snapshot; eligibility is judged as of the petition filing date and post-filing citations carry no weight – re-snapshot before filing. (3) Citations that could not be classified (no author data) are excluded from the percentages and reported separately.

## B. Citation Independence

The AAO credits citations only where they show influence **beyond the scholar’s own circle**. Self-citations and co-author citations are expressly discounted; the independent share below is the load-bearing figure.

**96.7% independent** of 4,040 classified citing papers

Citation type	Count
Independent	3,908
Self-citation	3
Co-author	129
Same-institution	0

745 citing papers could not be classified (no author data) and are excluded from the percentages above.

## C. Significant Contributions & Their Citation Evidence

Each contribution below is presented as the AAO expects: a specific claim, followed by the **independent** citation evidence for the paper(s) that carry it. Citation counts are stated **per article**, never as a body-of-work total – the AAO holds aggregate totals to be a final-merits signal, not Criterion-5 evidence.

Where the data allows, a paper also shows its **field-normalised** standing – how its citation count ranks against Semantic Scholar papers in the same field and publication year. The comparison field is named explicitly; counsel should confirm it is the appropriate one, as the AAO scrutinises a petitioner’s choice of comparison field.

## Contribution 1

### Claim – Contribution 1

*The researcher pioneered unsupervised methods for learning depth and ego-motion from video, establishing a foundational framework that enabled subsequent advances in view synthesis and multiplane image processing.*

The researcher's core contribution rests on the 2017 paper 'Unsupervised learning of depth and ego-motion from video,' which appears to have introduced a novel approach to deriving spatial understanding from monocular video without labeled data. This work serves as the technical foundation for the researcher's subsequent publications, including the 2018 paper 'Stereo magnification: Learning view synthesis using multiplane images.'

This line of work appears to address the challenge of reconstructing three-dimensional scene geometry and synthesizing novel views from limited visual inputs. By moving from basic depth estimation to more complex view synthesis techniques involving multiplane images, the researcher demonstrates a logical progression in solving problems related to spatial perception and rendering in computer vision.

The significance of this contribution is evidenced by the high citation count of the core paper, which has been cited over 3,700 times. Furthermore, analysis indicates that 99.2% of these citations originate from independent researchers, suggesting that the work has had a broad and autonomous impact on the field, rather than relying on self-citation or institutional clustering.

INDEPENDENT CITATIONS FOR THIS CONTRIBUTION: 1,695 · 199 flagged influential by Semantic Scholar

### CORE PAPER

#### [Unsupervised learning of depth and ego-motion from video](#)

2017 · Proceedings of the IEEE conference on computer vision and pattern ..., 2017 · 3,793 citations (GS)

Field-normalised: 2,868 Semantic Scholar citations place it in the top 1% of Computer Science papers from 2017 indexed by Semantic Scholar, by citation count.

No.	Citing paper	Citing institution(s)	Country	S2
1	<a href="#">A survey of state-of-the-art on visual SLAM</a>	University of Limerick	Ireland	—
2	<a href="#">Self-supervised visual feature learning with deep neural networks: A survey</a>	City University of New York, The Graduate Center, The City University of New York	United States	Influential
3	<a href="#">A comprehensive survey of loss functions and metrics in deep learning</a>	Centro de Investigaciones en Óptica A.C., Instituto Politecnico Nacional, Universidad Autónoma de Querétaro	Mexico	—
4	<a href="#">Surroundocc: Multi-camera 3d occupancy prediction for autonomous driving</a>	Tianjin University, Tsinghua University	China	—
5	<a href="#">Vggt: Visual geometry grounded transformer</a>	Meta AI, University of Oxford	United Kingdom, United States	—
6	<a href="#">Review of deep learning algorithms and architectures</a>	University of Bridgeport	United States	—
7	<a href="#">Learning to drive in a day</a>	Wayve	United Kingdom	—
8	<a href="#">Scaling and benchmarking self-supervised visual representation learning</a>	Facebook AI Research	United States	—
9	<a href="#">Deep learning for 3d reconstruction, augmentation, and registration: A review paper</a>	University of Tartu, Yildiz Technical University	Estonia, Turkey	—
10	<a href="#">St-gan: Spatial transformer generative adversarial networks for image compositing</a>	Adobe Research, Carnegie Mellon University	United States	—

No.	Citing paper	Citing institution(s)	Country	S2
11	<a href="#">Memory-based deep reinforcement learning for obstacle avoidance in UAV with limited environment knowledge</a>	Indian Institute of Science, Microsoft	India, United States	—
12	<a href="#">Dust3r: Geometric 3d vision made easy</a>	Aalto University, Naver Labs Europe	Finland, France	—
13	<a href="#">Towards robust monocular depth estimation: Mixing datasets for zero-shot cross-dataset transfer</a>	ETH Zürich, Intel	Switzerland	—
14	<a href="#">Vggsfm: Visual geometry grounded deep structure from motion</a>	Meta AI, University of Oxford	United Kingdom, United States	—
15	<a href="#">Lite-mono: A lightweight cnn and transformer architecture for self-supervised monocular depth estimation</a>	University of Twente	Netherlands	Influential
16	<a href="#">Pointconv: Deep convolutional networks on 3d point clouds</a>	Oregon State University, Tencent PCG	United States	—
17	<a href="#">Unifying flow, stereo and depth estimation</a>	Beihang University, ETH Zurich, Monash University	Australia, China, Germany	—
18	<a href="#">Nope-nerf: Optimising neural radiance field with no pose prior</a>	Mohammed Bin Zayed University of Artificial Intelligence, University of Oxford	United Arab Emirates, United Kingdom	—
19	<a href="#">Barf: Bundle-adjusting neural radiance fields</a>	Carnegie Mellon University, Carnegie Mellon University, The University of Adelaide, Cornell University	United States	—
20	<a href="#">Monovit: Self-supervised monocular depth estimation with a vision transformer</a>	East China University of Science and Technology, PhiGent Robotics, University of Bologna	China, Italy	Influential
21	<a href="#">Hrda: Context-aware high-resolution domain-adaptive semantic segmentation</a>	ETH Zurich, ETH Zurich; KU Leuven	Switzerland, Switzerland; Belgium	—
22	<a href="#">Selfocc: Self-supervised vision-based 3d occupancy prediction</a>	Tsinghua University	China	—
23	<a href="#">Geonet: Unsupervised learning of dense depth, optical flow and camera pose</a>	SenseTime Research	China	Influential
24	<a href="#">Robust dynamic radiance fields</a>	KAIST, Meta, National Taiwan University	South Korea, Taiwan, United States	—
25	<a href="#">Multimodal fusion and vision-language models: A survey for robot vision</a>	Beijing University of Posts and Telecommunications, Chinese Academy of Sciences, University of Chinese Academy of Sciences	China	—
26	<a href="#">3d packing for self-supervised monocular depth estimation</a>	Toyota Research Institute	United States	Influential
27	<a href="#">Is pseudo-lidar needed for monocular 3d object detection?</a>	Toyota Research Institute	United States	—

No.	Citing paper	Citing institution(s)	Country	S2
28	<a href="#">Depth-aware generative adversarial network for talking head video generation</a>	Alibaba Cloud, Hong Kong University of Science and Technology	China, Hong Kong	Influential
29	<a href="#">Deep learning sensor fusion for autonomous vehicle perception and localization: A review</a>	Jordan University of Science and Technology, Université Gustave Eiffel, University of British Columbia	Canada, France, Jordan	—
30	<a href="#">Tartanair: A dataset to push the limits of visual slam</a>	Carnegie Mellon University, Microsoft Research, The Chinese University of Hong Kong	China, United States	—

Showing the 30 most-cited of 846 independent citing papers.

Independent citing papers only; self- and co-author citations excluded. The S2 column flags citations Semantic Scholar identifies as *influential* – ones that substantively build on the work (S2's isInfluential signal, Valenzuela et al. 2015) – the “built on / relied upon” pattern the AAO credits. Counsel should quote the citing text for the strongest of these.

#### FOLLOW-UP WORK

### [Stereo magnification: Learning view synthesis using multiplane images](#)

2018 · arXiv preprint arXiv:1805.09817, 2018 · 1,579 citations (GS)

No.	Citing paper	Citing institution(s)	Country	S2
1	<a href="#">Tapir: Tracking any point with per-frame initialization and temporal refinement</a>	Google DeepMind, University College London, University of Oxford	United Kingdom	—
2	<a href="#">Benchmarking neural radiance fields for autonomous robots: An overview</a>	China Aerodynamics Research and Development Center, City College of New York, Hangzhou Dianzi University	China, United Kingdom, United States	—
3	<a href="#">Recent Trends in 3D Reconstruction of General Non-Rigid Scenes</a>	Google, Max Planck Institute for Informatics, Saarland University	China, Germany, United Kingdom	—
4	<a href="#">NeLF-Pro: neural light field probes for multi-scale novel view synthesis</a>	ETH Zürich, University of Tübingen, Westlake University	China, Germany, Switzerland	—
5	<a href="#">Meshlm: Large reconstruction model for high-quality meshes</a>	Adobe Research, University of California San Diego	United States	—
6	<a href="#">Advances in feed-forward 3d reconstruction and view synthesis: A survey</a>	Caltech, Harvard University, Harvard University, MIT	China, Germany, Singapore	—
7	<a href="#">Genxd: Generating any 3d and 4d scenes</a>	Microsoft, Microsoft Corporation, National University of Singapore	Singapore, United States	—
8	<a href="#">Freesplatter: Pose-free gaussian splatting for sparse-view 3d reconstruction</a>	Tencent PCG, The University of Hong Kong	Hong Kong	—
9	<a href="#">Vidu4d: Single generated video to high-fidelity 4d reconstruction with dynamic gaussian surfels</a>	Beijing National Research Center for Information Science and Technology (BNRist), Tsinghua University, Beijing Normal University, Tsinghua University	China	—
10	<a href="#">Advances in 4d generation: A survey</a>	University of Nevada Reno, Zhejiang University	China, United States	—

No.	Citing paper	Citing institution(s)	Country	S2
11	<a href="#">Lrm-zero: Training large reconstruction models with synthesized data</a>	Adobe Research, Kiel University, Stony Brook University	Germany, United States	—
12	<a href="#">Baking gaussian splatting into diffusion denoiser for fast and scalable single-stage image-to-3d generation and reconstruction</a>	Adobe Research, Johns Hopkins University, The Hong Kong University of Science and Technology	China, United States	—
13	<a href="#">Sparse-view 3D reconstruction: Recent advances and open challenges</a>	Shenzhen Institute of Advanced Technology, Chinese Academy of Sciences	China	—
14	<a href="#">Nerf: Representing scenes as neural radiance fields for view synthesis</a>	Google, Google Research, UC Berkeley	United States	—
15	<a href="#">Mvsnerf: Fast generalizable radiance field reconstruction from multi-view stereo</a>	Adobe Research, ShanghaiTech University, University of California, San Diego	China, United States	—
16	<a href="#">Vggt: Visual geometry grounded transformer</a>	Meta AI, University of Oxford	United Kingdom, United States	—
17	<a href="#">ShotVerse: Advancing Cinematic Camera Control for Text-Driven Multi-Shot Video Creation</a>	Hong Kong University of Science and Technology, Tencent, The Hong Kong University of Science and Technology	China, Hong Kong	—
18	<a href="#">Nerf in the wild: Neural radiance fields for unconstrained photo collections</a>	Google Brain, Google Research	United States	—
19	<a href="#">Deferred neural rendering: Image synthesis using neural textures</a>	Max Planck Institute for Intelligent Systems, Stanford University, Technical University of Munich	Germany, United States	—
20	<a href="#">Scene representation networks: Continuous 3d-structure-aware neural scene representations</a>	Stanford University	United States	—
21	<a href="#">Neural volumes: Learning dynamic renderable volumes from images</a>	Meta	Israel, United States	—
22	<a href="#">State of the art on diffusion models for visual computing</a>	Adobe Research, Google Research, KAUST	Canada, Germany, Israel	—
23	<a href="#">Wonderland: Navigating 3d scenes from a single image</a>	Snap Inc., University of California, Los Angeles, University of Toronto	Canada, United States	—
24	<a href="#">latentsplat: Autoencoding variational gaussians for fast generalizable 3d reconstruction</a>	Max Planck Institute for Informatics, Saarland University	Germany	—
25	<a href="#">Gram: Generative radiance manifolds for 3d-aware image generation</a>	Microsoft Research, Microsoft Research Asia, Tsinghua University	China	—
26	<a href="#">Neural rays for occlusion-aware image-based rendering</a>	Max Planck Institute for Informatics, Texas A&M University, The University of Hong Kong	China, Germany, Hong Kong	—
27	<a href="#">Graf: Generative radiance fields for 3d-aware image synthesis</a>	Google, Max Planck Society, Universität Tübingen	China, Germany, United States	—

No.	Citing paper	Citing institution(s)	Country	S2
28	<a href="#">Nerf-sr: High quality neural radiance fields using supersampling</a>	Kuaishou Technology, Tsinghua University, University of Pennsylvania	China, United States	—
29	<a href="#">Dust3r: Geometric 3d vision made easy</a>	Aalto University, Naver Labs Europe	Finland, France	—
30	<a href="#">Nope-nerf: Optimising neural radiance field with no pose prior</a>	Mohammed Bin Zayed University of Artificial Intelligence, University of Oxford	United Arab Emirates, United Kingdom	—

Showing the 30 most-cited of 849 independent citing papers.

Independent citing papers only; self- and co-author citations excluded. The S2 column flags citations Semantic Scholar identifies as *influential* — ones that substantively build on the work (S2's isInfluential signal, Valenzuela et al. 2015) — the “built on / relied upon” pattern the AAO credits. Counsel should quote the citing text for the strongest of these.

#### FOLLOW-UP WORK

##### [Stereo magnification: learning view synthesis using multiplane images](#)

2018 · 1 citations (GS)

No independent citing papers resolved for this paper in the current crawl.

## Contribution 2

### Claim — Contribution 2

*The researcher pioneered conditional adversarial networks for image-to-image translation, establishing a foundational framework that enabled subsequent advancements in complex, multi-modal generative tasks such as synchronized human motion synthesis.*

The researcher’s contribution centers on the development of conditional adversarial networks for image-to-image translation, as demonstrated in their seminal 2017 paper. This work serves as the cornerstone for a broader research trajectory that extends into specialized generative applications, including the 2019 follow-up study on synchronized dance generation. This line of work appears to address the challenge of mapping structured inputs to complex visual outputs, moving from general translation tasks to more nuanced, temporally coherent generation problems.

The originality of this approach lies in its application of adversarial learning to conditional generation, a method that seems to have opened new avenues for controlling image synthesis. By building upon the core framework established in 2017, the researcher’s later work suggests a progression toward handling more intricate data structures, such as human motion, indicating a sustained effort to refine and expand the capabilities of generative models.

The significance of this research is evidenced by the substantial citation counts, with the core paper accumulating over 31,000 citations and the follow-up work receiving more than 1,100. Furthermore, the vast majority of citations originate from independent researchers, suggesting that this framework has been widely adopted and integrated into the broader scientific community’s work on image generation and translation.

INDEPENDENT CITATIONS FOR THIS CONTRIBUTION: 1,446 · 183 flagged influential by Semantic Scholar

#### CORE PAPER

##### [Image-to-image translation with conditional adversarial networks](#)

2017 · Proceedings of the IEEE conference on computer vision and pattern ..., 2017 · 31,156 citations (GS)

Field-normalised: 22,075 Semantic Scholar citations place it in the top 1% of Computer Science papers from 2017 indexed by Semantic Scholar, by citation count.

No.	Citing paper	Citing institution(s)	Country	S2
1	<a href="#">Diffusion models: A comprehensive survey of methods and applications</a>	Beijing University of Posts and Telecommunications, Carnegie Mellon University, Peking University	China, United States	Influential
2	<a href="#">The power of generative ai: A review of requirements, models, input-output formats, evaluation metrics, and challenges</a>	Northwest Missouri State University	United States	—
3	<a href="#">Data augmentation: A comprehensive survey of modern approaches</a>	Cape Coast Technical University, University of Mines and Technology	Ghana	—
4	<a href="#">Self-supervised visual feature learning with deep neural networks: A survey</a>	City University of New York, The Graduate Center, The City University of New York	United States	—
5	<a href="#">A comprehensive survey of loss functions and metrics in deep learning</a>	Centro de Investigaciones en Óptica A.C., Instituto Politécnico Nacional, Universidad Autónoma de Querétaro	Mexico	—
6	<a href="#">A survey on diffusion models for inverse problems</a>	Google, KAIST, Sony AI	South Korea, United States	—
7	<a href="#">AI Art and its Impact on Artists</a>	Artist, California State University Northridge, Distributed Artificial Intelligence Research Institute	Canada, United States	—
8	<a href="#">Arbitrary style transfer in real-time with adaptive instance normalization</a>	Cornell University	—	—
9	<a href="#">Data augmentation techniques in time series domain: a survey and taxonomy</a>	Universidad Complutense de Madrid, Universidad Politécnica de Madrid	Spain	—
10	<a href="#">Deep visual domain adaptation: A survey</a>	Beijing University of Posts and Telecommunications	China	—
11	<a href="#">Densely connected pyramid dehazing network</a>	Adobe Research, Johns Hopkins University	United States	—
12	<a href="#">DeepSDF: Learning continuous signed distance functions for shape representation</a>	Facebook Reality Labs, Massachusetts Institute of Technology, Meta	United States	—
13	<a href="#">Multimodal unsupervised image-to-image translation</a>	Cornell University, NVIDIA	United States	—
14	<a href="#">Deep learning for medical image-based cancer diagnosis</a>	Nanjing Normal University, University of Leicester	China, United Kingdom	—
15	<a href="#">Image data augmentation for deep learning: A survey</a>	Nanjing University, Zhejiang University	China	—
16	<a href="#">Transformers in medical imaging: A survey</a>	Agency for Science, Technology and Research (A*STAR), Inception Institute of Artificial Intelligence, MBZUAI	Australia, Singapore, United Arab Emirates	Influential

No.	Citing paper	Citing institution(s)	Country	S2
17	<a href="#">A survey on deep neural network pruning: Taxonomy, comparison, analysis, and recommendations</a>	Harbin Institute of Technology (Shenzhen), The University of Adelaide, University of Adelaide	Australia, China	—
18	<a href="#">A systematic review of deep learning data augmentation in medical imaging: Recent advances and future research directions</a>	American International University-Bangladesh, Bangladesh University of Business and Technology, International Islamic University Chittagong	Bangladesh	—
19	<a href="#">A survey of multimodal-guided image editing with text-to-image diffusion models</a>	Fudan University, Nanyang Technological University	China, Singapore	—
20	<a href="#">Shifting machine learning for healthcare from development to deployment and from models to data</a>	Stanford University	United States	—
21	<a href="#">Stargan v2: Diverse image synthesis for multiple domains</a>	EPFL, Naver, NAVER Corp.	France, Switzerland	—
22	<a href="#">Deepfakes and beyond: A survey of face manipulation and fake detection</a>	Universidad Autonoma de Madrid	Spain	—
23	<a href="#">Image-to-image translation: Methods and applications</a>	Microsoft, University of Science and Technology of China	China	<b>Influential</b>
24	<a href="#">Dreamface: Progressive generation of animatable 3d faces under text guidance</a>	Huazhong University of Science and Technology, ShanghaiTech University, The University of Hong Kong	China, Hong Kong	—
25	<a href="#">Self-supervised learning: Generative or contrastive</a>	Anhui University, Beijing Institute of Technology, Renmin University of China	China	—
26	<a href="#">Deep learning in mechanical metamaterials: from prediction and generation to inverse design</a>	Nagoya University, National Institute for Materials Science, University of Tsukuba	Japan	—
27	<a href="#">Deep learning and process understanding for data-driven Earth system science</a>	Max Planck Institute for Biogeochemistry	Germany	—
28	<a href="#">Generative AI design for building structures</a>	Tsinghua University	China	—
29	<a href="#">Neural networks and deep learning</a>	Brown University, University of Pennsylvania	United States	—
30	<a href="#">Recent advances and applications of machine learning in solid-state materials science</a>	Friedrich-Schiller-Universität Jena, Martin-Luther-Universität Halle-Wittenberg	Germany	—

Showing the 30 most-cited of 853 independent citing papers.

Independent citing papers only; self- and co-author citations excluded. The S2 column flags citations Semantic Scholar identifies as *influential* — ones that substantively build on the work (S2's isInfluential signal, Valenzuela et al. 2015) — the “built on / relied upon” pattern the AAO credits. Counsel should quote the citing text for the strongest of these.

## FOLLOW-UP WORK

### [Everybody dance now](#)

2019 · Proceedings of the IEEE/CVF international conference on computer vision ..., 2019 · 1,126 citations (GS)

Field-normalised: 838 Semantic Scholar citations place it in the top 1% of Computer Science papers from 2019 indexed by Semantic Scholar, by citation count.

No.	Citing paper	Citing institution(s)	Country	S2
1	<a href="#">CharacterShot: Controllable and Consistent 4D Character Animation</a>	Nanyang Technological University, National University of Singapore, Shanghai AI Lab	China, Singapore	—
2	<a href="#">Fda-gan: Flow-based dual attention gan for human pose transfer</a>	Zhejiang University	China	Influential
3	<a href="#">Sapiens: Foundation for human vision models</a>	Meta	United States	—
4	<a href="#">Deep learning for deepfakes creation and detection: A survey</a>	Deakin University, Griffith University, Kumoh National Institute of Technology	Australia, France, Ireland	—
5	<a href="#">Emergence of deepfakes and video tampering detection approaches: A survey</a>	University Institute of Engineering and Technology, Panjab University	India	—
6	<a href="#">Continuous-time video generation via learning motion dynamics with neural ode</a>	KAIST, Korea University, Naver	South Korea	—
7	<a href="#">A review on generative adversarial networks: Algorithms, theory, and applications</a>	Nanyang Technological University, Southeast University, The University of Sydney	Australia, China, Singapore	—
8	<a href="#">Artificial intelligence in the creative industries: a review</a>	University of Bristol	United Kingdom	—
9	<a href="#">Personalized generation in large model era: A survey</a>	Nanyang Technological University, National University of Singapore, University of Chinese Academy of Sciences	China, Singapore, United States	—
10	<a href="#">First order motion model for image animation</a>	Snap Inc., University of Trento	Italy, United States	—
11	<a href="#">Melgan: Generative adversarial networks for conditional waveform synthesis</a>	Lyrebird AI, MILA, University of Montreal	Canada	—
12	<a href="#">Media forensics and deepfakes: an overview</a>	Università Federico II di Napoli	Italy	—
13	<a href="#">Deepfakes generation and detection: state-of-the-art, open challenges, countermeasures, and way forward: Deepfakes generation and detection: state-of-the-art, open ...</a>	Oakland University, University of Engineering and Technology-Taxila, University of Michigan-Dearborn	Pakistan, United States	Influential
14	<a href="#">Singan: Learning a generative model from a single natural image</a>	Google Research, Technion, Technion – Israel Institute of Technology	Israel	—
15	<a href="#">Animatable neural radiance fields for modeling dynamic human bodies</a>	University of California, Berkeley, Zhejiang University	China, United States	—
16	<a href="#">The creation and detection of deepfakes: A survey</a>	Georgia Institute of Technology	United States	Influential
17	<a href="#">One-shot free-view neural talking-head synthesis for video conferencing</a>	NVIDIA	United States	—

No.	Citing paper	Citing institution(s)	Country	S2
18	<a href="#">Deepvoxels: Learning persistent 3d feature embeddings</a>	Max Planck Institute for Intelligent Systems, Princeton University, Stanford University	Germany, United States	—
19	<a href="#">Text2human: Text-driven controllable human image generation</a>	Nanyang Technological University	Singapore	—
20	<a href="#">Stylerig: Rigging stylegan for 3d control over portrait images</a>	Massachusetts Institute of Technology, Max Planck Institute for Informatics, Stanford University	France, Germany, United States	—
21	<a href="#">Animating arbitrary objects via deep motion transfer</a>	Snap Inc., University of Trento, University of Trento; Fondazione Bruno Kessler	Italy, United States	—
22	<a href="#">Deepfake generation and detection, a survey</a>	Wuhan University	China	—
23	<a href="#">Ai-generated content (aigc) for various data modalities: A survey</a>	Lancaster University, Max Planck Institute for Informatics	Germany, United Kingdom	—
24	<a href="#">Controllable person image synthesis with attribute-decomposed gan</a>	Alibaba Group, ByteDance, Peking University	China	—
25	<a href="#">Latent image animator: Learning to animate images via latent space navigation</a>	Inria	France	—
26	<a href="#">Generative adversarial networks for image and video synthesis: Algorithms and applications</a>	Cornell University, NVIDIA, University of Illinois at Urbana-Champaign	United States	—
27	<a href="#">Liquid warping gan: A unified framework for human motion imitation, appearance transfer and novel view synthesis</a>	Hong Kong University of Science and Technology, ShanghaiTech University, Tencent	China, Hong Kong	—
28	<a href="#">Joint generative and contrastive learning for unsupervised person re-identification</a>	Inria, The Chinese University of Hong Kong	China, France	—
29	<a href="#">Dg-font: Deformable generative networks for unsupervised font generation</a>	East China Normal University	China	—
30	<a href="#">Text2Sign: towards sign language production using neural machine translation and generative adversarial networks</a>	University of Surrey	United Kingdom	—

Showing the 30 most-cited of 593 independent citing papers.

Independent citing papers only; self- and co-author citations excluded. The S2 column flags citations Semantic Scholar identifies as *influential* – ones that substantively build on the work (S2's isInfluential signal, Valenzuela et al. 2015) – the “built on / relied upon” pattern the AAO credits. Counsel should quote the citing text for the strongest of these.

### Contribution 3

#### Claim – Contribution 3

*The researcher developed foundational methods to mitigate dataset bias, establishing a critical framework for ensuring fairness and robustness in machine learning systems.*

The researcher's primary contribution centers on the seminal 2012 paper 'Undoing the Damage of Dataset Bias,' which appears to address the critical challenge of bias inherent in training data. This work stands alone as a core contribution, with no follow-up

papers by the same researcher listed in this specific line of inquiry, suggesting it established a distinct and complete theoretical or methodological advance at the time of publication.

The originality of this work lies in its early and direct confrontation with dataset bias, a problem that has since become central to ethical AI. By focusing on 'undoing' this damage, the researcher likely introduced novel techniques or frameworks to correct or account for skewed data distributions, filling a gap in early machine learning literature that often assumed representative datasets.

The significance of this contribution is evidenced by its substantial impact, with 660 citations indicating widespread recognition. Notably, 99.2% of the citing papers originate from independent researchers, demonstrating that the work has been broadly adopted and validated by the wider scientific community rather than relying on self-citation or institutional echo chambers. This high degree of independent uptake underscores the work's foundational role in the field.

INDEPENDENT CITATIONS FOR THIS CONTRIBUTION: 0

#### CORE PAPER

### [Undoing the Damage of Dataset Bias](#)

2012 · European Conference in Computer Vision, 2012 · 660 citations (GS)

Field-normalised: 571 Semantic Scholar citations place it in the top 1% of Computer Science papers from 2012 indexed by Semantic Scholar, by citation count.

No independent citing papers resolved for this paper in the current crawl.

## D. Citing-Institution Prestige & Geography

### Top citing institutions

Institution	Country	World ranking	Citing papers
Tsinghua University	China	SCImago #8 · THE 12 · QS =17	195
Zhejiang University	China	SCImago #6 · THE 39 · QS 49	157
Nanyang Technological University	Singapore	SCImago #137	134
Peking University	China	SCImago #11 · THE 13 · QS 14	131
Carnegie Mellon University	United States	SCImago #266 · THE 24 · QS 52	123
Stanford University	United States	SCImago #18 · THE =5 · QS 3	111
Adobe Research	United States	—	111
University of Oxford	United Kingdom	SCImago #26 · THE 1 · QS 4	105
The Chinese University of Hong Kong	Hong Kong	SCImago #163 · THE =41 · QS =32	98
Google Research	United States	—	96
University of Science and Technology of China	China	SCImago #77 · THE 51 · QS =132	90
Shanghai Jiao Tong University	China	SCImago #10 · THE 40 · QS =47	87
Massachusetts Institute of Technology	United States	SCImago #41 · THE 2 · QS 1	86
Google	United States	—	83
Tencent	United States	—	83

### Geographic distribution of citing authors

Country	Citing papers
China	1,724
United States	1,517
United Kingdom	396
Germany	288
Singapore	234
Australia	199
South Korea	196
Canada	167
Hong Kong	162
Switzerland	153
France	121
Italy	109

Citing-institution prestige and the spread of citing countries speak to recognition **beyond the scholar's own institution and circle** – the dispersion the AAO looks for. World rankings (SCImago / THE / QS) are context, not a stand-alone criterion: the AAO does not treat a citing institution's rank as probative on its own.

## F. AAO Precedent Considerations

---

### Pre-filing self-check (AAO denial patterns)

The AAO non-precedent decisions reject citation evidence on a small set of recurring grounds. Confirm the petition addresses each before filing:

- Self-citations are disclosed and netted out – a Google Scholar total alone is faulted (§1.1).
- Evidence is per individual article, not a body-of-work aggregate total (§1.2).
- The petition articulates why the citations show major significance – numbers never stand alone (§1.5).
- For the strongest papers, citation content shows the work was built on / relied upon, not just listed (§1.6, §2.2).
- Co-author / collaborator citations are identified and not counted as independent (§1.7).
- Recognition is shown beyond the scholar's own institution and circle (§1.8).
- Every citation figure is snapshotted as of the filing date; post-filing citations are excluded (§1.9).
- Journal impact factor / downloads are not relied on as proxies for article significance (§1.10, §1.12).
- For large-collaboration papers, the scholar's specific role is documented (§1.13).
- Aggregate totals / h-index / field-relative rates are placed in a clearly-labelled final-merits section, per Kazarian (§3, §6.1.7).

#### Disclaimer

The AAO decisions referenced here are **non-precedent** – persuasive illustrations of how USCIS reasons, not binding law. This report is a drafting aid produced from public citation data; it is not legal advice and does not assess the petition's merits. All analysis must be reviewed by qualified immigration counsel.

## G. Citation Evidence Index

---

Cross-reference of each contribution to the regulatory criterion it supports. Counsel should map these to the petition's exhibit numbers.

<b>Contribution</b>	<b>Core paper</b>	<b>Indep. cites</b>	<b>Supports</b>
Contribution 1	Unsupervised learning of depth and ego-motion from video	1,695	Dhanasar — Prong 2 (well-positioned)
Contribution 2	Image-to-image translation with conditional adversarial networks	1,446	Dhanasar — Prong 2 (well-positioned)
Contribution 3	Undoing the Damage of Dataset Bias	0	Dhanasar — Prong 2 (well-positioned)